



XT-81NP

Main Features

- Mega-Pixel (1280x960 Resolution)
- Power over Ethernet available
- True Day/Night Function
- Mechanism IR Cut Filter available
- MPEG-4/MJPEG Compression Format
- 2-way audio
- Support cell phone/PDA/3GPP
- Dual Streaming
- SDK for Software Integration
- Wireless available



Interface

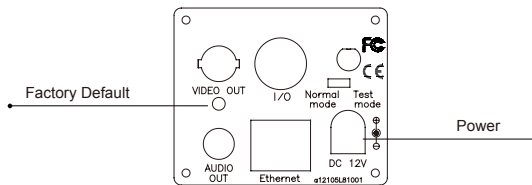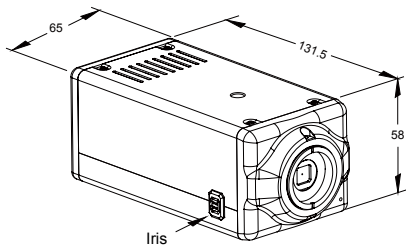

Unit: mm

Specifications

Hardware	
CPU	ARM 9 ,32 bit RISC
RAM	64MB
ROM	16MB
Image sensor	1/3" SONY Progressive CCD
Sensitivity	0.1 lux, F=1.2
Lens Type	CS Mount
Support DC IRIS	Yes
ICR	Mechanism IR Cut Filter
I/O	2 in/ 2 out
RS-485	Yes
Video Out	1
Mode	Test mode: VGA ON Network OFF Normal mode: Network ON
Microphone	Built-in
Audio Out	1
Power over Ethernet	Yes
Power Consumption	LAN: DC 12V, 450mA WLAN: DC 12V, 550mA
Operating Temperature	-10°C~45°C
Dimensions	65mm (W) x 58mm (H) x 131.5mm (D)
Weight	450 g
Network	
Ethernet	10/ 100 Base-T
Network Protocol	HTTP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, 3GPP, UPnP
Wireless	802.11b/g
WEP	64/ 128 bit

System	
Video Resolution	MJPEG: 1280x960, 640x480 MPEG-4: 640x480, 320x240, 160x120
Video adjust	Brightness, Contrast, Saturation, Hue
Dual Streaming	Yes
CCD setting	AES, BLC, AGC, Day/ Night (Auto)
Image snapshot	Yes
Full screen monitoring	Yes
Compression format	MPEG-4/ MJPEG
Motion Detection	Yes, 3 different areas
Triggered Action	Mail, FTP
Pre/ Post alarm	Yes, configurable
Security	Password protection
Firmware upgrade	HTTP mode, can be upgraded remotely
Simultaneous connection	Up to 10
Audio	Yes, 2-way (Duplex Support)
Client system requirements	
OS	Windows 2000/2003, XP, Vista, Microsoft IE 6.0 or above
Hardware	
Suggested	Intel-C 2.8G, RAM: 512MB, Graphic card: 64MB
Minimum	Intel-C 1.6G, RAM: 256MB, Graphic card: 32MB

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE